


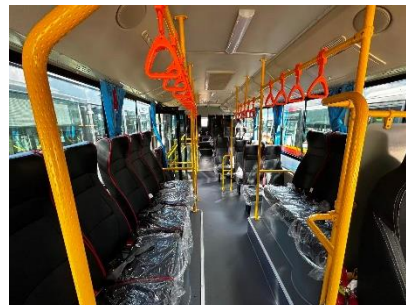

Bus Model:	KLQ6926G (TWO STEP)
-------------------	----------------------------

Standard seat number :		37+1+1	Overhang front//rear	Mm	1950/2850
Overall dimensions:	mm	9245x2440x3180	Max speed	km/h	80
Manufacturer's max. total mass	kg	13700	Kerb mass	kg	9660
Wheelbase	mm	4400	Fuel tank:	L	200

STANDARD CHASSIS	
Engine:	YC6J245-52 (Euro V)
Gearbox:	FAST Transmission with Power shifting
Propeller shaft :	Strengthened propeller shaft
Retarder and ABS	Terca retarder with brake pedal switch
Suspension:	Air Suspension
Front Axle:	Fangsheng front axle (disk)
Rear Axle:	Fangsheng rear axle (drum);
Brake	Dual-circuit service brake, spring energy parking brake
Steering:	BOSCH Power steering gear
Tyre & Wheel:	255/70R22.5
Others	Stainless steel wheel cover with ABS sensor, auto-greaser; with Konsberg couplings

STANDARD BODY	
Body structure:	Semi-monocoque
Electro-coating:	Higer Electrocoating body and chassis with 16 processes, at 15 years anti corrosion
Air Conditioner:	28000kCal/h, Bock compressor, NTC aircon
Camera monitor:	Color reverse camera and reverse radar.
Lighting system	Equipped, LED
Seats:	3 x 2 Jiaya seat, 2 point seat belt
Passenger door:	Remote control, front single+ middle double door
Windows	Build-in sliding windows; light green glass
Rear view mirror:	Electric control rabbit ear
Floor:	Anti-attrition floor leatheroid
Emergency Roof Exit:	2 emergency roof exit
Others:	Automatic fire extinguisher device in engine compartment; safety hammer; 4Kg fire extinguisher; with Destination dashboard (Front and Rear); with CCTV and LED destination dashboard; Safety hammer;